

CCTV IP / Professional NVRs


# SF-NVR8416A-16P-B2

## SF-NVR8416A-16P-B2

### 4K NVR 6 Series

Network recorders capable of ultra-high resolution 4K cameras or high efficiency H.265+ encoding. Monitoring up to 2 Ch@4K or 8 Ch@1080p with auto-adaptive mode that achieves simultaneous display of a large number of cameras without exhausting graphics resources. Maximum utilisation of UHD monitors from the 4K HDMI output. Relay/alarm connections for physical integration of other devices. Versions with integrated PoE power supply and auto-add-on mode for simplified and centralised installation.

- NVR recorder for IP cameras B2 range
- 16CH PoE Ports / Compression H.265S / 4HDD
- Resolution up to 12Mpx / Bandwidth 160Mbps
- HDMI 4K and VGA / Dewarping Fisheye
- Facial recognition, Video metadata

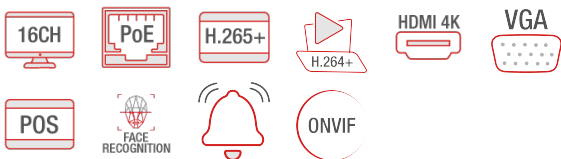

## Technical Specification

System	
OS	Embedded Linux
Video	
IP Video Input	16CH IPC input
Network Bandwidth	160Mbps/160Mbps (incoming/outgoing)
Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Output	HDMI1 : 3840 × 2160/1920 × 1080 / 1280 × 1024 / 1024 × 768 HDMI2 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA ×1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA and HDMI1 output the same video source
Multi-screen Display	Main output: 1/4/6/8/9/13/16 (live view) AUX output: 1/4/6/8/9 (live view) Max. 16+9CH local live view
Compression	H.265S/H.265+/H.265/H.264
Audio	
Network Input	16 CH IPC audio input
2-way Audio	RCA × 1
Local Output	RCA × 1
Compression	G.711(U/A)
Record	
Record Stream	Dual stream recording
Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Frame Rate	12MP: 20fps; 8MP or lower resolution: NTSC: 30fps; PAL: 25fps
Playback	
Simultaneous Playback	Max 16CH
Search	Time slice / time / event / tag / smart search
Function	Play, pause, FF, FB, digital zoom, etc.
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Decoding Capability	
Live View/Playback	1CH 12MP/4CH 1080P
Alarm	
Mode	Manual, sensor, motion, exception, smart events, etc.

<b>Input</b>	16 CH local alarm input
<b>Output</b>	4 CH
<b>Triggering</b>	Record, snap, preset, e-mail, etc.

## Network

<b>Interface</b>	RJ 45 1000 Mbps × 2
<b>Protocol</b>	TCP / IP, IPv4, IPv6, UDP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x, RTSP, SNMP, ONVIF, etc.
<b>Client Connection</b>	Max.64 users access

## Face

<b>Face Detection Performance (AI by IPC)</b>	16CH
<b>Face Detection Performance (AI by Device)</b>	2 CH
<b>Face Match Performance</b>	6 CH
<b>Comparison Capability</b>	18 pictures / second
<b>Face Picture Database</b>	32 libraries 10000 Face Pictures
<b>Face Picture Search</b>	Search by picture is supported
<b>Database Management</b>	Add, modify, delete and search face pictures
<b>Face Picture Adding</b>	Add face pictures through APP, WEB and external import
<b>Face Picture Comparison</b>	Support successful face recognition alarm and stranger match alarm
<b>Track</b>	Track display on a map
<b>Statistical Graph of Information</b>	Bar graph
<b>Statistical Mode of Information</b>	Statistics by day, week, month, quarter as well as customized time period

## Video Structure Analysis

<b>Human/Vehicle Classification</b>	Yes
-------------------------------------	-----

## Other Functions

<b>Fisheye Access</b>	Supports fisheye dewarping via Web Client and mobile APP
<b>Plate Recognition (AI by IPC)</b>	Yes

## PoE

<b>PoE Port</b>	RJ 45 100Mbps × 16
<b>Standard</b>	IEEE802.3AF/AT
<b>Output Power</b>	≤ 150W

## Mobile Device

<b>OS</b>	iOS, Andriod
-----------	--------------

Storage	
HDD Interface	SATA × 4, max 10T for each HDD
E-SATA Interface	E-SATA × 1
Backup	
Local Backup	U disk, USB mobile HDD
Network Backup	Yes
External Interface	
RS 485	Yes (full-duplex), connect to PTZ or keyboard
USB	USB 3.0 × 1 ; USB 2.0 × 2
Remote Controller	Optional
Others	
Power Supply	ATX 300W(PoE)
Consumption	≤ 20W ( without HDD and PoE power supply )
Dimensions(mm)	440 × 390 × 70( W × D × H )
Certificate	CE,FCC
Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE
Working Environment	-10 °C ~ 50 °C 10% ~ 90% humidity