



Description

opera is a remote control device with a minimalist design and multiple functions. A small remote control for big everyday use: opera is our device that can activate up to 7 different scenarios that can be configured according to your needs. But that's not all: thanks to two-way communication, it provides the status of the system (armed, disarmed, partially armed), which is displayed by the 3 LEDs located on the buttons. In addition, the execution of the scenario is confirmed not only by the lighting up of an LED but also by the vibration of the device.



KSI7700000.001 - white
KSI7700000.003 - grey
KSI7700000.008 - red
KSI7700000.002 - black

Why opera


- Available in 4 colours: white, red, grey and black.
- SOS function: when active, any button on the remote control, including the central one, always performs the same action, such as directly activating the sirens or sending notifications such as voice calls, text messages, emails, etc.
- Battery self-check: by holding down the centre button, you can check the battery charge status based on the number of LEDs that light up.

Technical Specifications

Radio frequency:	868 MHz
Battery:	CR2032 lithium
Battery life:	up to 6 years
Range in open air:	up to 400 m
Dimensioni	30 x 58 x 15 mm (WxHxD)

System maximum configuration

lares 4.0 models	wls 96	16	40	40 wls	140 wls	644 wls
Maximum number of remote controls	16	16	64	64	64	64

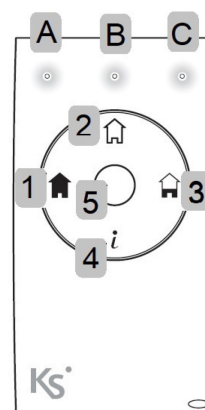

LEDS

- A ARMED
- B DISARMED
- C PARTIAL

KEYS

- 1. ARMED
- 2. DISARMED
- 3. PARTIAL
- 4. INFO STATUS
- 5. BATTERY LEVEL

PANIC/SOS function (any key)

How to order

KSI7700000.001 - white
KSI7700000.003 - grey
KSI7700000.008 - red
KSI7700000.002 - black



Accessories

KSI7203002.000 - CR2032 button battery as a replacement for wireless devices (200 pieces per pack).

Certifications

- Europe - CE, RoHS
- IMQ:
 - EN 50131-1:2006 + A1:2009 + A2:2017 + A3:2020
 - EN 50131-3: 2009
 - EN 50131-5-3:2017
 - Grade 2 - Class II
- INCERT: T031: 2017 + A1:2018 + A2:2022



D-Q2T-0027

Specifiche tecniche, aspetto, funzionalità ed altre caratteristiche del prodotto, possono cambiare senza preavviso.